

Model 430LRT


SCISSOR LIFTS

Performance

• Working Height	15.11 m
Platform Height — Elevated	13.11 m
A. Platform Height — Lowered	1.84 m
B. Platform Railing Height	1.10 m
C. Stowed Height (Rails Folded)	2.39 m
D. Platform Size	1.79 m x 3.86 m
Front Deck Extension	1.14 m
Rear Deck Extension	1.14 m
Megadeck Platform Size	NA
E. Overall Width	2.31 m
F. Overall Length	4.88 m
G. Wheelbase	2.97 m
• Ground Clearance	0.35 m
• Platform Capacity	568 kg
• Capacity on Optional Deck Extension(s)	230 kg
• Lift/Lower Time	45/47 sec.
• Maximum Drive Height	FULL DRIVE HEIGHT
• Machine weight ¹	7.155 kg
• Maximum Ground Bearing Pressure	6.7 kg/cm ²
• Drive Speed 4WD	5.6 km/h
• Gradeability 4WD	45%
• Turning Radius — Inside	2.70 m
• Turning Radius — Outside	5.93 m
• Axle Oscillation	0.20 m

¹ Certain options or country standards may increase weight and/or dimensions.

Dimensions

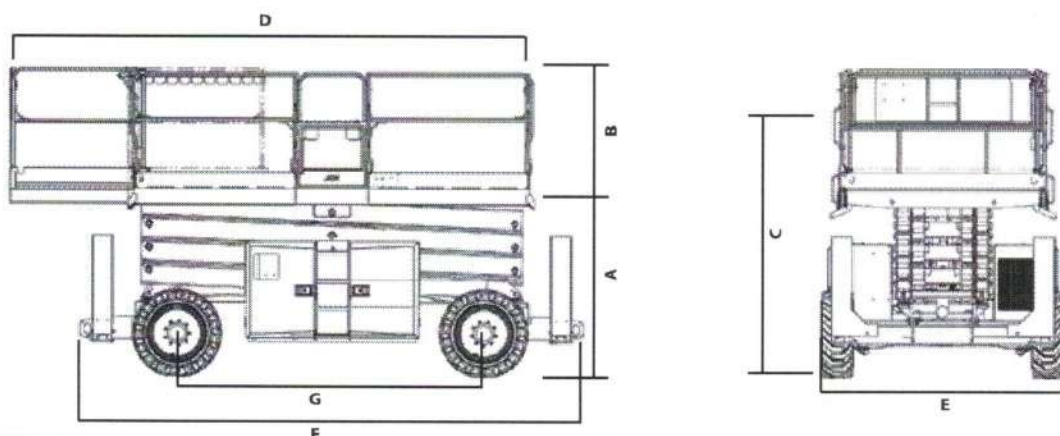

9, rue des Marlis, 08300 Acy-Romance
Tél : 03 24 38 64 38 - 09 70 60 11 91
SARL au capital de 30600 - RCS Sedan
Siret : 520 649 682 00025 - APE 7732 - TVA : FR 59 520 649 682

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. Platform to load the is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.



JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Tel: +31 (0)23 565 5665
Fax: +31 (0)23 557 3750
www.jlg.com

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

An Oshkosh Corporation Company