


Model 530LRT

ROUGH TERRAIN SCISSOR LIFTS



Performance

• Working Height	18.15 m
• Platform Capacity (incl Dual extension)	680 kg
• Capacity on Optional Deck Extension(s)	230 kg
• Dimensions:	
Platform Height Elevated	16.15 m
A. Platform Height Lowered	2.02 m
B. Platform Railing Height	1.13 m
C. Platform Size	1.91 m x 4.06 m
D. Platform Extension	1.14 m
E. Overall Length	4.88 m
F. Overall Width	2.31 m
G. Wheelbase	2.97 m
H. Ground Clearance	32 cm
• Lift/Lower Time	65/60 seconds
• Maximum Drive Height	9.75 m
• Maximum Weight ^{1/2}	7,995 kg
• Maximum Ground Bearing Pressure	6.7 kg/cm ²
• Drive Speed 4WD	5.6 km/h
• Gradeability 4WD	40%
• Turning Radius — Inside	4.04 m
• Turning Radius — Outside	6.02 m
• Axle Oscillation	0.20 m

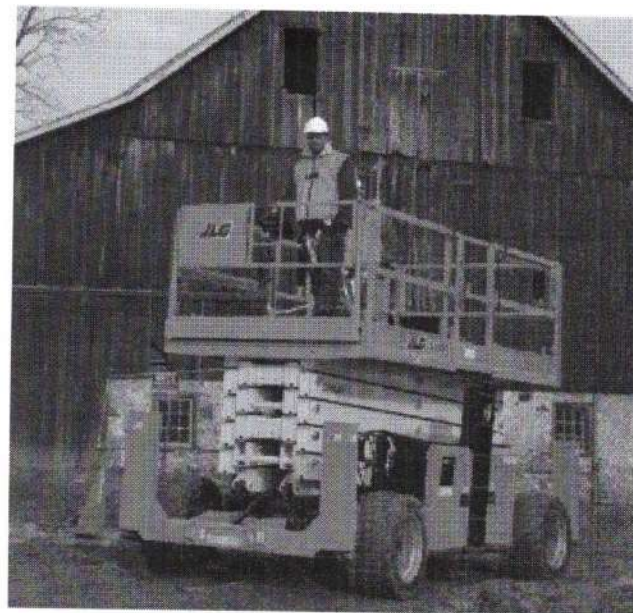

^{1/2} Certain options or country standards may increase weight and/or dimensions
^F With Standard tires

Dimensions

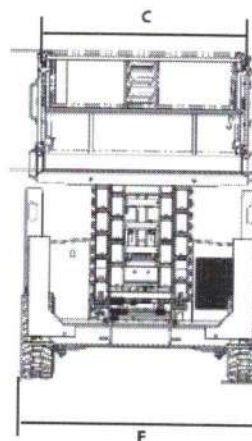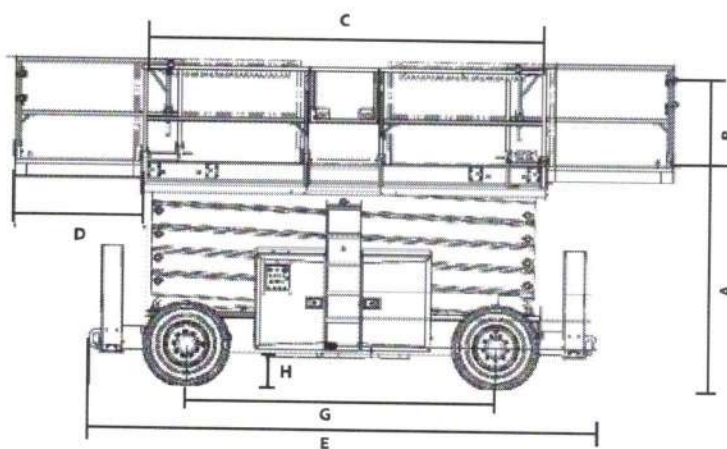

9, rue des Marlis, 08300 Acy-Romance
 Tél : 03 24 38 64 38 - 09 70 60 11 91

SARL du Capital de Risque - RCS Sedan
 Siret : 520 649 682 00025 - APE 7732 - TVA : FR 59 520 649 682

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



JLG EMEA BV

Polaris Avenue 63
 2132 JH Houtdorp
 The Netherlands
 Tel: +31 (0) 23 565 5665
 Fax: +31 (0) 23 557 3750
www.jlg.com

An Oshkosh Corporation Company